

**LED GLASS TUBE**

**Product Features**

High Quality & Performance  
 LED Glass Tube  
 Built in Driver, Mercury Free  
 Flicker Free, No UV & IR

**Application**

Car Park Lighting  
 Ware houses & Storage  
 Electrical & Plumbing Rooms  
 Body Work shops,  
 Garages, Factory


**Advantages**

80% Energy Saving  
 Environmentally Safe  
 Less Heat produced  
 Zero UV Emission




TECHNICAL DATA

Product Code	<b>RL-T8-11W</b>	<b>RL-T8-22W</b>
Power	11W (2Ft)	22W (4Ft)
Voltage	220-240V AC	220-240V AC
Luminous Flux	900 Lm	1800 Lm
Efficacy	90 Lm/W	90 Lm/W
Energy efficiency	A+	A+
Net weight	0.115 Kg	1.22 Kg
CRI	> 80	> 80
Beam angle	280°	280°
Operating temperature	-20 °C to +40 °C	-20 °C to +40 °C
Storage temperature	Up to 50°C	Up to 50°C
Body Material	Glass Body	Glass Body
CCT	3000K / 6500K	3000K / 6500K
IP	20	20
Dimmable	No	No
Life Time	30,000Hrs	30,000Hrs
Cover	No	No
Finishing color	White	White
Base	G13	G13
Size in mm (LXWXH)	604X25.4	1214X25.4



**RL-T8-11W**

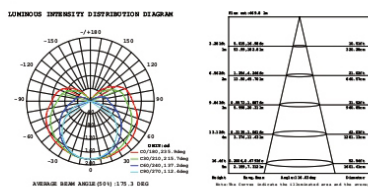

**RL-T8-22W**

