



Insulated Cord End Terminals



ITEM NO.	DIMENSION						CROSS SECTION		INSULATION SLEEVE COLOR (up)Germany (down)France
	F	L	W	B	D	C	A.W.G	mm ²	
E0506	6.0	12.0	2.6	6.0	1.3	1	#22	0.5	orange white
E0508	8.0	14.0							
E0510	10.0	16.0							
E7506	6.0	12.4	2.8	6.4	1.5	1.2	#20	0.75	white blue
E7508	8.0	14.6							
E7510	10.0	16.4							
E7512	12.0	18.4							
E1006	6.0	12.4	3	6.4	1.7	1.4	#18	1.0	yellow red
E1008	8.0	14.6							
E1010	10.0	16.4							
E1012	12.0	18.4							
E1508	8.0	14.6	3.5	6.4	2	1.7	#16	1.5	red black
E1510	10.0	16.4							
E1518	18.0	24.4							
E2508	8.0	15.2	4	7.0	2.6	2.3	#14	2.5	blue gray
E2512	12.0	19.0							
E2518	18.0	25.0							
E4009	9.0	16.5	4.4	7.5	3.2	2.8	#12	4.0	gray orange
E4012	12.0	19.5							
E4018	18.0	25.5							
E6012	12.0	20.0	6.3	8.0	3.9	3.5	#10	6.0	black green
E6018	18.0	26.0							
E10-12	12.0	21.5	7.6	9.5	4.9	4.5	#7	10.0	ivory brown
E10-18	18.0	27.5							
E16-12	12.0	22.2	8.8	10.2	6.2	5.8	#5	16.0	green ivory
E16-18	18.0	28.2							
E25-16	16.0	29.0	11.2	13.0	7.9	7.5	#4	25.0	brown black
E25-22	22.0	35.0							
E35-16	16.0	30.0	12.7	14.0	8.7	8.3	#2	35.0	taupe
E35-25	25.0	39.0							
E50-20	20.0	36.0	15.3	16.0	10.9	10.3	#1	50.0	olive
E50-25	25.0	41.0							
E70-20	20.0	37	16.0	17.0	14.3	13.5	Yellow	2/0 A.W.G. 70mm ²	
E70-25	25.0	42							
E95-25	25.0	44	18.5	19.0	15.3	14.5	Red	3/0 A.W.G. 95mm ²	

Cord End Terminals(Double Wire)

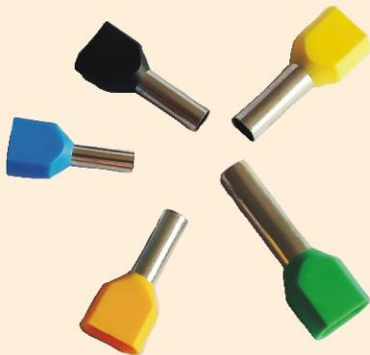

ITEM NO.	CROSS SECTION		DIMENSION					Insulation sleeve color of cross section	
	A.W.G	mm ²	L	F	D	C	W	France	Germany
TE0508	2*22	2*0.5	14.5	8	1.8	1.5	5.0	white	orange
TE7508	2*20	2*0.75	14.7	8	2.1	1.8	5.5	blue	white
TE7510	2*20	2*0.75	16.7	10	2.1	1.8	5.5		
TE1008	2*18	2*1.0	15.1	8	2.3	2.0	5.5	red	yellow
TE1010	2*18	2*1.0	17.1	10	2.3	2.0	5.5		
TE1508	2*16	2*1.5	15.5	8	2.6	2.3	6.4	red	red
TE1512	2*16	2*1.5	19.5	12	2.6	2.3	6.4		
TE2510	2*14	2*2.5	18.5	10	3.3	2.9	8.0	gray	blue
TE2513	2*14	2*2.5	21.5	13	3.3	2.9	8.0		
TE4012	2*12	2*4	23.1	12	4.2	3.8	8.8	orange	gray
TE6014	2*10	2*6	26.1	14	5.3	4.9	9.5	black	green
TE10-14	2*8	2*10	26.6	14	6.9	6.5	12.6	brown	yellow
TE16-14	2*6	2*16	33.3	14	8.7	8.3	19.0	white	green

Round Pre-insulating Terminal


Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=19A

Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
RV1.25-3.2	#4	3.2	5.7	17.8	4.95	10.0	4.3	Red
RV1.25-3.7S	#6	3.7	5.7	17.8	4.95			
RV1.25-3.7M	#6	3.7	6.6	20.1	6.3			
RV1.25-3.7L	#6	3.7	8.0	21.5	7.0			
RV1.25-4S	#8	4.3	6.6	20.1	6.3			
RV1.25-4L	#8	4.3	8.0	21.5	7.0			
RV1.25-5	#10	5.3	8.0	21.5	7.0			
RV1.25-6	1/4	6.5	11.6	27.5	11.1			
RV1.25-8	5/16	8.4	11.6	27.5	11.1			
RV1.25-10	3/8	10.5	13.6	31.6	13.9			



Size of cable: 0.5-1.5mm²(American standar 16-14) Max. Current=27A

Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
RV2-3.2	#4	3.2	6.6	17.8	4.3	10.0	4.9	Blue
RV2-3.7S	#6	3.7	6.6	17.8	4.3			
RV2-3.7M	#6	3.7	6.6	21.0	7.0			
RV2-3.7L	#6	3.7	8.5	22.5	7.75			
RV2-4S	#8	4.3	6.6	21.0	7.0			
RV2-4L	#8	4.3	8.5	22.5	7.75			
RV2-5S	#10	5.3	8.5	22.5	7.75			
RV2-5L	#10	5.3	9.5	22.5	7.25			
RV2-6	1/4	6.5	12.0	27.6	11.0			
RV2-8	5/16	8.4	12.0	27.6	11.0			
RV2-10	3/8	10.5	13.6	30.2	13.9			



Size of cable: 2.5-4mm²(American standard 14-12) Max. Current=37A

Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
RV3.5-4	#8	4.3	8.0	24.5	7.7	12.5	6.2	Black
RV3.5-5S	#10	5.3	8.0	24.5	7.7			
RV3.5-5L	#10	5.3	12.0	27.9	7.7			
RV3.5-6	1/4	6.5	12.0	27.9	7.7			

Size of cable: 4-6mm²(American standard 12-10) Max. Current=48A

Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
RV5.5-3.7	#6	3.7	7.2	21.4	5.9	12.5	6.7	Yellow
RV5.5-4	#8	4.3	7.2	21.4	5.9			
RV5.5-4	#8	4.3	9.5	25.5	8.3			
RV5.5-5	#10	5.3	9.5	25.5	8.3			
RV5.5-6	1/4	6.5	12.0	31.5	13.0			
RV5.5-8	5/16	8.4	12.0	33.7	13.7			
RV5.5-10	3/8	10.5	15.0	33.7	13.7			
RV5.5-12	1/2	13.0	19.2	38.1	16.0			

Fork Pre-insulating Terminal

Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=19A


Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
SV1.25-3.2	#4	3.2	5.7	21.2	6.5	10.0	4.3	Red
SV1.25-3.7S	#6	3.7	5.7	21.2	6.5			
SV1.25-3.7L	#6	3.7	6.4	21.2	6.5			
SV1.25-4S	#8	4.3	6.4	21.2	6.5			
SV1.25-4M	#8	4.3	7.2	21.2	6.5			
SV1.25-4L	#8	4.3	8.1	21.2	6.5			
SV1.25-5S	#10	5.3	8.1	21.2	6.5			
SV1.25-5L	#10	5.3	9.5	21.2	6.5			
SV1.25-6S	1/4	6.5	9.5	21.2	6.5			
SV1.25-6L	1/4	6.5	12.0	27.2	11.0			



Size of cable: 0.5-1.5mm²(American standard 16-14) Max. Current=27A

Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
SV2-3.2	#4	3.2	5.7	21.2	6.5	10.0	4.9	Blue
SV2-3.7S	#6	3.7	5.7	21.2	6.5			
SV2-3.7L	#6	3.7	6.4	21.2	6.5			
SV2-4S	#8	4.3	6.4	21.2	6.5			
SV2-4M	#8	4.3	7.2	21.2	6.5			
SV2-4L	#8	4.3	8.1	21.2	6.5			
SV2-5S	#10	5.3	8.1	21.2	6.5			
SV2-5L	#10	5.3	9.5	21.2	6.5			
SV2-6S	1/4	6.5	9.5	21.2	6.5			
SV2-6L	1/4	6.5	12.0	27.2	11.0			

Size of cable: 2.5-4mm²(American standard 14-12) Max. Current=37A



Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
SV3.5-4	#8	4.3	8.0	24.8	7.0	12.5	6.2	Black
SV3.5-5	#10	5.3	8.0	24.8	7.0			
SV3.5-6	1/4	6.5	12.0	28.0	12.1			

Size of cable: 4-6mm²(American standard 12-10) Max. Current=48A

Item no	Dimension							Color
	USA Screw	Screw Dia D2(mm)	B mm	L mm	F mm	H mm	DΦ mm	
SV5.5-3.5	#6	3.7	8.3	25.2	7.5	12.5	6.7	Yellow
SV5.5-4S	#8	4.3	8.3	25.2	7.5			
SV5.5-4L	#8	4.3	9.0	23.9	7.5			
SV5.5-5	#10	5.3	9.0	23.9	7.5			
SV5.5-6S	1/4	6.5	9.0	23.9	7.5			
SV5.5-6L	1/4	6.5	12.0	31.2	12.0			
SV5.5-8	5/16	8.4	14.0	30.0	11.5			

Insulated Female Terminals



Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=10A

Item no	Nema tab	Thickness or material	Dimension				
	mm		B	dφ	Dφ	L	H
FDD 1.25-110(5)	0.5X2.8	0.3	3.8	1.7	3.8	19.0	10.0
FDD 1.25-110(8)	0.8X2.8	0.3	3.8	1.7	3.8	19.0	
FDD 1.25-187(5)	0.5X4.75	0.35	5.6	1.7	3.8	19.0	
FDD 1.25-187(8)	0.8X4.75	0.35	5.6	1.7	3.8	19.0	
FDD 1.25-250	0.8X6.35	0.4	7.4	1.7	3.8	21.0	
FDD 1.25-250	0.8X6.35	0.4	7.4	1.7	3.8	21.0	

Size of cable: 1.5-2.5mm²(American standar 16-14) Max. Current=15A

FDD2-110(5)	0.5X2.8	0.3	3.8	2.3	4.3	19.0	10.0
FDD2-110(8)	0.8X2.8	0.3	3.8	2.3	4.3	19.0	
FDD2-187(5)	0.5X4.75	0.35	5.6	2.3	4.3	19.0	
FDD2-187(8)	0.8X4.75	0.35	5.6	2.3	4.3	19.0	
FDD2-250	0.8X6.35	0.4	7.4	2.3	4.3	21.0	
FDD2-312	0.8X8.0	0.4	9.0	2.3	4.3	23.0	

Size of cable: 4-6mm²(American standar 12-10) Max. Current=24A

FDD 5.5-250	0.5X6.35	0.4	7.4	3.4	5.7	25.0	12.5
FDD 5.5-250	1.2X9.4	0.5	10.9	3.4	5.7	29.6	14

Insulated Male Terminals



Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=10A

Item no	Nema tab	Thickness or material	Dimension				
	mm		B	dφ	Dφ	L	H
MDD 1.25-110(8)	0.8X2.8	0.8	2.8	1.70	3.8	17.7	10.0
MDD 1.25-187(5)	0.5X4.75	0.5	4.75	1.70	3.8	20.0	
MDD 1.25-187(8)	0.8X4.75	0.8	4.75	1.70	3.8	18.5	
MDD 1.25-250	0.8X6.35	0.4	6.35	1.70	3.8	21.0	
MDD 1.25-250	0.8X6.35	0.4	6.35	1.70	3.8	21.0	

Size of cable: 1.5-2.5mm²(American standar 16-14) Max. Current=15A

MDD2-187(5)	0.5X4.75	0.5	4.75	2.3	4.3	20.0	10.0
MDD2-187(8)	0.8X4.75	0.8	4.75	2.3	4.3	18.5	
MDD2-250	0.8X6.35	0.4	6.35	2.3	4.3	21.0	

Size of cable: 4-6mm²(American standar 12-10) Max. Current=24A

MDD 5.5-250	0.8X6.35	0.4	6.35	3.4	5.7	25.0	12.5
-------------	----------	-----	------	-----	-----	------	------

Fully Insulated Connectors



Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=10A

Item no	Nema tab	Dimension				
	mm	W	B	Dφ	dφ	L
FDFD 1.25-187(5)	0.5X4.75	7.6	5.6	3.8	1.7	20.0
FDFD 1.25-187(8)	0.8X4.75	7.6	5.6	3.8	1.7	20.0
FDFD 1.25-250	0.8X6.35	9.4	7.4	3.8	1.7	21.5
FDFD 2-187(5)	0.5X4.75	7.6	5.6	4.3	2.3	20.0
FDFD 2-187(8)	0.8X4.75	7.6	5.6	4.3	2.3	20.0
FDFD 2-250	0.8X6.35	9.4	7.4	4.3	2.3	21.5
FDFD 5.5-250	0.8X6.35	9.4	7.4	5.7	3.4	25.5

Long full-insulating middle joint



Item no	Cable size		Dimension			
	A.W.G	mm ²	l	Dφ	L	lmax
BV1.25	22-16	0.5-1.5	15.0	1.7	26.0	19A
BV2	16-14	1.5-2.5	15.0	2.3	26.0	27A
BV5.5	12-10	4-6	15.0	3.4	26.0	48A
BV8	#8	6-10	21.0	4.5	32.0	62A
BV14	#6	10-16	26.0	5.8	42.0	88A
Bv22	#4	16-25	29.0	7.7	50.0	115A
BV38	#2	35-50	32.0	9.4	55.0	160A

Bullet type Insulated & Female Connectors

Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=10A



Item no	Thickness or material mm	Dimension						Color
		bφ	F	DΦ	dφ	H	L	
MPD 1.25-156	0.4	4.0	11.0	3.8	1.7	10.0	21.0	red

Size of cable: 1.5-2.5mm²(American standar 16-14) Max. Current=15A

Item no	Thickness or material mm	Dimension						Color
		bφ	F	DΦ	dφ	H	L	
MPD 2-156	0.4	4.0	11.0	4.3	2.3	10.0	21.0	blue
MPD 2-195	0.4	5.0	11.0	4.3	2.3	10.0	21.0	

Size of cable: 4-6mm²(American standar 12-10) Max. Current=24A

Item no	Thickness or material mm	Dimension						Color
		bφ	F	DΦ	dφ	H	L	
MPD 5.5-195	0.4	5.0	11.0	5.7	3.4	12.5	25.0	yellow

Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=10A



Item no	Thickness or material mm	Dimension						Color
		bφ	BΦ	DΦ	dφ	F	L	
FRD 1.25-156	0.4	4.0	6.3	3.8	1.7	13.0	24.5	red


Size of cable: 1.5-2.5mm²(American standar 16-14) Max. Current=15A

Item no	Thickness or material mm	Dimension						Color
		bφ	BΦ	DΦ	dφ	F	L	
FRD 2-156	0.4	4.0	6.3	4.3	2.3	14.0	24.5	blue
FRD 2-195	0.4	5.0	7.0	4.3	2.3	14.0	24.5	

Size of cable: 4-6mm²(American standar 12-10) Max. Current=24A

Item no	Thickness or material mm	Dimension						Color
		bφ	BΦ	DΦ	dφ	F	L	
FRD 5.5-195	0.4	5.0	7.0	5.7	3.4	14.0	29.5	yellow

Piggy Back Disconnector



Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=10A

Item no	Nema tab	Dimension					
	t mm	B mm	B1 mm	H mm	DΦ mm	dφ mm	L mm
PBDD1.25-250	0.8X6.35	7.4	6.3	10.0	3.8	1.7	21.5
PBDD 2-250	0.8X6.35	7.4	6.3	10.0	4.3	2.3	21.5
PBDD 2-250	0.8X6.35	7.4	6.3	10.0	4.3	2.3	21.5

Chip-shaped pre-insulating Terminal

Size of cable: 0.5-1.5mm²(American standar 22-16) Max. Current=19A



Item no	Dimension			
	W	L	F	DΦ
	mm	mm	mm	mm
DBV 1.25-10	2.3	20.0	10.0	4.3
DBV 1.25-11	3.0	21.0	11.0	
DBV 1.25-14	3.0	24.0	14.0	
DBV 1.25-18	2.3	28.0	18.0	
DBV 2-9	2.8	19.0	9.0	4.9
DBV 2-18	2.3	28.0	18.0	
DBV 5.5-10	2.8	22.5	10.0	6.7

Insulated Pin terminals



Item no	Dimension				Color
	FΦ	L	H	DΦ	
	mm	mm	mm	mm	
PTV 1.25-9	1.9	19.0	10.0	4.3	Red
PTV 1.25-10	1.9	20.0			
PTV 1.25-12	1.9	22.0			
PTV 1.25-13	1.9	23.0			
PTV 2-9	1.9	19.0	10.0	4.9	Blue
PTV 2-10	1.9	20.0			
PTV 2-12	1.9	22.0			
PTV 2-13	1.9	23.0			
PTV 5.5-13	2.8	25.5	12.5	6.7	Yellow

Fast wiring connectors



ITEM NO.	USING LINE DIA	Color	DIMENSION	
			W	L
DB1.25-N3	0.5~1.5mm ²	red	20	32
DB1.25-N4	22~16			
DB2-N3	1.5~2.5mm ²	blue	20	32
DB2-N4	16~14			
DB5.5-N3	2.5~6mm ²	yellow	20	32
DB5.5-N4	12~10			

Insulated lipped Blade Terminals




ITEM NO.	CROSS SECTION MM ²	DIMENSION					
		W	L	F	H	D	d1
LBV1.25-3	0.5-1.5	3.0	26.8	16.8	10.0	4.3	1.7
LBV1.25-4.6	22-16	4.6					
LBV2-3	1.5-2.5	3.0	4.9			2.3	
LBV2-4.6	16-14	4.6					
LBV5.5-3	4-6	3.0	29.3	12.5	6.7	3.4	
LBV5.5-4.6	12-10	4.6					

Butt connector with shrinkable insulation



BHT1
BHT2
BHT5

Flag female connector



FLDNY1-250
FLDNY2-250

Spiral Wire Joints



P71,P72,P73,P74,P75



P1

P2

Viny wire end cap



V1. 25 V80
V2 V100
V3. 5 V125
V5. 5 V150
V8 V200
V14 V240
V22 V325
V38 V400
V60 V500
V70 V630

Hook Terminal



HV1-3,7
HV 1-4
HV 1-5
HV 1-6
HV2-3,7
HV 2-4
HV 2-5
HV 2-6
HV5-3,7
HV 5-4
HV 5-5
HV 5-6
HV5-8

Art.No.E-100

50PCS Grey E4012
20PCS Yellow E6012
20PCS Red E10-12
10PCS Blue E16-12




Art.No.E-400

50PCS White E0508
100PCS Blue E7508
100PCS Red E1008
100PCS Black E1508
50PCS Grey E2508



Art.No.TE-200

TE7508 50PCS Grey
TE1008 50PCS Red
TE1508 50PCS Black
TE2510 50PCS Blue



IT-150(Art.No.229468)



BV1.25 5pcs
BV2 5pcs
FRD1.25-156 5pcs
FRD2-156 5pcs
MPD1.25-156 5pcs
MPD2-156 5pcs
RV1.25-4 10pcs
RVL2-4 10pcs
PBDD1.25-250 10pcs
PBDD2-250 10pcs
FDD1.25-250 20pcs
FDD2-250 20pcs
MDD1.25-250 20pcs
MDD2-250 20pcs

Art.-No.IT-172+Tool



RV1- 3. 5 13pcs
RV1- 4 8pcs
RV2- 3 8pcs
RV2- 4 13pcs
RV1. 25-5 8pcs
RVL2- 5 8pcs
RV5 5- 5 5pcs
SV1. 25-3 10pcs
SV2- 3 10pcs
SV2- 4 13pcs
SV5 5- 5 5pcs
BV1. 25 15pcs
BV2 11pcs
BV5. 5 5pcs
FDD1. 25-250 10pcs
FDD2- 250 10pcs
MDD1. 25-250 10pcs
MDD2- 250 10pcs

Art.-No. IT-175



RV1.25-3 15PC SV1.25-4 10PC
RV1.25-4 10PC SV2- 4 10PC
RV1.25-5 10PC BV1.25 10PC
RV2-3 15PC BV2 5PC
RV2-4 10PC BV5.5 10PC
RV2-5 10PC MDD1.25-250 10PC
RV5.5-5 5PC MDD2-250 10PC
RV5.5-6 5PC FDD1.25-250 10PC
SV1.25-3 10PC FDD2-250 10PC

Art.-No. IT-300



RV1.25-3	25PC	SV1.25-4	20PC
RV1.25-4	25PC	SV2-4	10PC
RV1.25-5	25PC	BV1.25	10PC
RV2-3	15PC	BV2	10PC
RV2-4	20PC	BV5.5	10PC
RV2-5	10PC	MDD1.25-250	20PC
RV5.5-5	5PC	MDD2-250	20PC
RV5.5-6	5PC	FDD1.25-250	20PC
SV1.25-3	20PC	FDD2-250	20PC

Art.-No. IT-360



RV2-5	15PC	FDD2-250	25PC
RV2-6	15PC	MPD2-256	25PC
RV2-10	10PC	FRD2-156	10PC
RV5.5-5	10PC	MDMNY2-250	10PC
RV5.5-6	10PC	DFNY2-250	10PC
RV5-10	10PC	BV1.25	30PC
RV2-5	10PC	BV2	30PC
RV5.5-5	5PC	BV5.5	15PC
MDD2-250	15PC	Bv8	15PC

Art.-No. IT-760



RV1.25-3	80PC	SV1.25-4	80PC
RV1.25-4	80PC	SV2-4	10PC
RV1.25-5	80PC	BV1.25	10PC
RV2-3	80PC	BV2	20PC
RV2-4	10PC	BV5.5	40PC
RV2-5	10PC	MDD1.25-250	40PC
RV5.5-5	40PC	MDD2-250	40PC
RV5.5-6	40PC	FDD1.25-250	10PC
SV1.25-3	80PC	FDD2-250	10PC

Art.-No. IT-1200



RV1.25-3	80PC	SV1.25-4	80PC
RV1.25-4	80PC	SV2-4	80PC
RV1.25-5	80PC	BV1.25	50PC
RV2-3	80PC	BV2	50PC
RV2-4	80PC	BV5.5	40PC
RV2-5	60PC	MDD1.25-250	70PC
RV5.5-5	40PC	MDD2-250	70PC
RV5.5-6	40PC	FDD1.25-250	70PC
SV1.25-3	80PC	FDD2-250	70PC

Art.-No. IT-300



FDD1.25-250	25PC
FDD2-250	25PC
MDD1.25-250	25PC
MDD2-250	25PC
PBDD1.25-250	25PC
PBDD2-250	25PC
MPD1.25-156	25PC
MPD2-156	25PC
FRD1.25-156	25PC
FRD2-156	25PC
BV1.25	25PC
BV2-250	25PC


Art.-No. IT-600



BV1.25	33pcs
BV2	33pcs
RVL2-4	34pcs
MDD1.25-250	50pcs
MDD2-250	50pcs
FDD1.25-250	50pcs
FDD2-250	50pcs
MPD1.25-156	50pcs
MPD2-156	50pcs
FRD1.25-156	50pcs
FRD2-156	50pcs
FRD2-156	50pcs
PBDD1.25-250	50pcs
PBDD2-250	50pcs

Art.No.IT-750+Tool

E0508	200PCS
E7508	200PCS
E1010	200PCS
E2512	150PCS
HS-8-6-4D	Tool

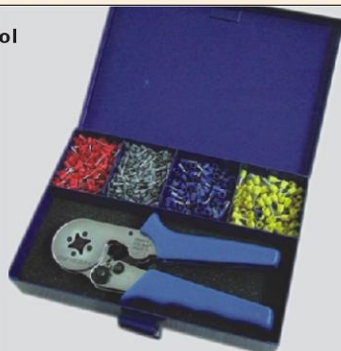

Art.No.IT-1200+ Tool


E0508	200PCS
E7508	200PCS
E1010	200PCS
E2512	200PCS
E4012	200PCS
E6012	100PCS
E10-12	100PCS
HS-8-6-4D	Tool



Nylon Cable Tie

Material: Nylon 66, 94V-2 certificated by UL. Hearesisting, Acid & erosion control, insulate well and not apt to age.
 Operating temperature: -35°C to 85°C
 Color: Natural (or white, standard color), UV black and other colors are available as requested.

Size	Length	Width (mm)	Bundle Dia (mm)	Tensile (Lbs)	Strength (Kgs)
2.5*60	2 3/8"	2.5	2-11	18	8
2.5*80	3 3/16"	2.5	2-16	18	8
2.5*100	4"	2.5	2-22	18	8
2.5*120	4 3/4"	2.5	2-30	18	8
2.5*150	6"	2.5	2-35	18	8
2.5*160	6 1/4"	2.5	2-40	18	8
2.5*200	8"	2.5	3-50	18	8
3.6*100	4"	3.5	2-22	40	18
3.6*150	6"	3.5	3-35	40	18
3.6*180	7"	3.5	3-42	40	18
3.6*200	8"	3.5	3-50	40	18
3.6*250	10"	3.5	3-65	40	18
3.6*280	11"	3.5	3-70	40	18
3.6*300	11 5/8"	3.5	3-80	40	18
3.6*370	14 1/2"	3.5	3-102	40	18
4.8*120	4 3/4"	4.8	3-24	50	22
4.8*180	7"	4.8	3-42	50	22
4.8*200	8"	4.8	3-50	50	22
4.8*250	10"	4.8	3-65	50	22
4.8*280	11"	4.8	3-70	50	22
4.8*300	11 5/8"	4.8	3-82	50	22
4.8*350	13 3/4"	4.8	3-90	50	22
4.8*380	15"	4.8	3-102	50	22
4.8*400	15 3/4"	4.8	3-105	50	22
4.8*430	17"	4.8	3-110	50	22
4.8*450	17 3/4"	4.8	3-130	50	22
4.8*500	19 11/16"	4.8	3-150	50	22
4.8*550	21 11/16"	4.8	3-160	50	22
7.2*150	6"	7.2	3-33	120	55
7.2*200	8"	7.2	3-50	120	55
7.2*250	10"	7.2	4-63	120	55
7.2*300	11 5/8"	7.2	4-82	120	55
7.2*350	13 3/4"	7.2	4-90	120	55
7.2*380	14 1/4"	7.2	4-98	120	55
7.2*400	15 3/4"	7.2	4-105	120	55
7.2*450	17 3/4"	7.2	4-118	120	55
7.2*500	19 11/16"	7.2	4-150	120	55
7.2*550	21 1/16"	7.2	8-160	120	55
9*450	17 3/4"	9.0	10-125	120	80
9*500	19 11/16"	9.0	12-150	120	80
9*550	21 1/16"	9.0	8-160	120	80
9*600	23 2/3"	9.0	12-15	175	80
9*650	25 9/16"	9.0	8-190	175	80
9*700	27 1/2"	9.0	12-205	175	80
9*760	30"	9.0	10-225	175	80
9*800	31.5"	9.0	10-230	175	80
9*900	36 1/4"	9.0	10-265	175	80
9*1000	40 1/6"	9.0	10-295	175	80
9*1100	43.3"	9.0	10-335	175	80
9*1200	47.2"	9.0	10-370	175	80
12*650	25 9/16"	12.0	14-190	250	114
12*900	36"	12.0	14-265	250	114

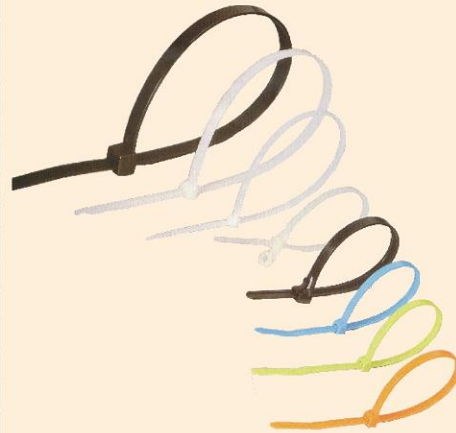

Cable Clip

Material: PP material with steel nail

How to use: Put the cable under the clip and hammer the nail into the wall to secure the cable.

Application: Securing of cables for general indoor wiring.




Cable Clip (Flat)



Type	A(mm)	R(mm)	Nail(mm)	Packing
4mm	5.3	4	1.7 × 15	100PCS & 1000PCS
5mm	6.5	5	1.7 × 15	
6mm	8.1	6	1.7 × 17	
7mm	8.7	7	1.8 × 18	
8mm	9.6	8	1.9 × 18	
9mm	10.7	9	2.0 × 20	
10mm	11.7	10	2.1 × 23	
12mm	12.8	12	2.3 × 23	
14mm	14.9	14	2.3 × 25	
16mm	16.9	16	2.3 × 30	
18mm	20.8	18	2.5 × 33	
20mm	23.5	20	2.8 × 38	
22mm	25	22	2.8 × 40	
25mm	27.7	25	2.8 × 45	
30mm	33	30	3.0 × 45	
32mm	35	32	3.2 × 55	
35mm	39	35	3.2 × 58	
40mm	45	40	3.5 × 60	

Type	A(mm)	Diameter		Nail(mm)	Packing
		H(mm)	R(mm)		
4mm	6	3.8	4	1.7 × 15	
5mm	6	3.8	5	1.7 × 15	
6mm	6.5	4.1	6	1.7 × 17	
7mm	7.0	4.7	7	1.9 × 18	100PCS
8mm	7.5	5.0	8	2.05 × 20	&
9mm	8.2	5.4	9	2.05 × 23	1000PCS
10mm	8.6	5.7	10	2.3 × 23	
12mm	9.0	6.1	12	2.3 × 25	
14mm	11.2	6.5	14	2.3 × 30	

Cable Clip (new)

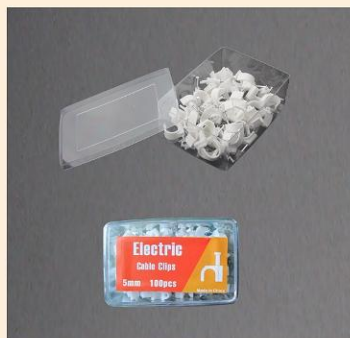

Type	Pcs/Box	Boxes/Ctn
4mm	100pcs	250
5mm	100pcs	250
6mm	100pcs	200
7mm	100pcs	200
8mm	100pcs	200
9mm	100pcs	100
10mm	100pcs	100
12mm	100pcs	100
14mm	100pcs	100
16mm	100pcs	50
18mm	100pcs	50
20mm	100pcs	50
22mm	100pcs	50
25mm	80pcs	50

Nylon cable gland PG type



Model	Cable Range(mm)	Thread O.D. L2(mm)	Thread Length L1(mm)	Spanner Size A&E(mm)	Qty/bag
PG7	3-6.5	12.5	9	18/16	100
PG9	4-8	15.2	9	22/19	100
PG11	5-10	18.6	9	24/22	100
PG13.5	6-11	20.4	10	27/24	100
PG16	10-13	22.5	10	30/27	100
PG19	12-15	24	10	30/28	100
PG21	13-18	28.3	12	35/33	100
PG25	16-21	30	12	37/35	50
PG29	18-25	37	12	45/42	50
PG36	22-32	47	15	58/52	20
PG42	32-38	54	18	62/58	20
PG48	37-44	59.3	18	70/64	20
PG63	42-50	71	30	83/77	10

Nylon cable gland M type



Model	Thread Size	Cable Range(mm)	Thread O.D. L2(mm)	Thread Length L1(mm)	Spanner Size A&E(mm)	Qty/bag
M12	M12*1.5	3~6.5	12	9	18/16	100
M16	M16*1.5	4~8	16	9	22/19	100
M18	M18*1.5	5~10	18	9	24/22	100
M20	M20*1.5	6~11	20	10	27/24	100
M22	M22*1.5	10~13	22	10	30/27	100
M24	M24*1.5	12~15	24	10	30/28	100
M25	M25*1.5	12~15	25	11	31/28	100
M27	M27*1.5	13~18	27	12	35/33	100
M28	M28*1.5	13~18	28	12	35/33	100
M30	M30*1.5	16~21	30	12	37/35	50
M32	M32*1.5	16~21	32	12	38/35	50
M36	M36*1.5	18~25	36	12	45/42	50
M40	M40*1.5	22~32	40	15	52/52	20
M46	M46*1.5	22~32	46	15	58/52	20
M50	M50*1.5	32~38	50	18	62/58	20
M58	M58*1.5	37~44	58	18	70/64	20
M63	M63*1.5	37~44	63	18	72/64	20

Nylon Cable Gland: MG type



Item No.	Threaded entry metric(mm)	Cable range Φ(mm)	D1	Panel mounting hole(mm)	L1	L3	A(mm)
MG-12	M12X1.5	7.6-4.6	12	12.5	8.5	19	18
MG-16	M16X1.5	10-6	16	16.5	15	22	22
MG-20	M20X1.5	14-9	20	20.5	15	27	27
MG-25	M25X1.5	18-13	25	25.5	15	33	33
MG-32	M32X1.5	32.5-18	32	33	15	41	41
MG-40	M40X1.5	30-24	40	41	20	50	50
MG-50	M50X1.5	39-30	50	51	22	62	61
MG-63	M63X1.5	48.5-40	63	64	25	75	75

Copper Cable Gland:PG type



Model	Cable Range (mm)	Thread O.D . AG (mm)	Thread length GL (mm)	Spanner Size (mm)
PG7	3-6.5	12.5	10	14
PG9	4-8	15.2	10	17
PG11	5-10	18.6	10	20
PG13.5	6-12	20.4	10	22
PG16	10-14	22.5	10	24
PG21	13-18	28.3	12	30
PG29	18-25	37	12	40
PG36	22-32	47	15	50
PG42	32-38	54	15	57
PG48	37-44	59.3	15	64

Nylon Cable Gland:FG type



Model
FG12
FG14
FG16
FG20
FG22
FG25
FG32
FG40
FG50

Nylon Cable Gland:PGL type



Model
PGL7
PGL9
PGL11
PGL13.5
PGL16
PGL19
PGL21
PGL25
PGL29
PGL36
PGL42
PGL48

Plastic Threaded Plug PG/M Type



Model	Model
PG7	M12
PG9	M16
PG11	M18
PG13.5	M20
PG16	M22
PG21	M25
PG29	M27
PG36	M32
PG42	M40
PG48	M50
	M63

Metallic Threaded Plug PG/M Type



Model	Model
PG7	M12
PG9	M16
PG11	M18
PG13.5	M20
PG16	M22
PG21	M25
PG29	M27
PG36	M32
PG42	M40
PG48	M50
	M63

Cable Gland With Strain Relief



Model	Model
PG7	M12
PG9	M16
PG11	M18
PG13.5	M20
PG16	M22
PG21	M25
	M27

PVC Adaptable Gland



20mm

25mm

32mm

Stainless Steel Cable Tie-Ball Lock Type

Grade:301,304,316



Part Number	Approx.Length mm(inch)	Approx. Width mm(inch)	Max.Bundle Dia. mm(inch)	min.loop Tensile Strength N(lbs)
4.6x150	150(5.9)	4.6(0.181)	37(1.46)	600(135)
4.6x200	200(7.87)		50(1.97)	
4.6x250	250(9.84)		63(2.48)	
4.6x300	300(11.8)		76(2.99)	
4.6x350	350(13.78)		89(3.5)	
4.6x400	400(15.75)		102(4.02)	
4.6x450	450(17.72)		115(4.53)	
4.6x500	500(19.69)		128(5.04)	
4.6x550	550(21.65)		141(5.55)	
7.9x600	600(23.62)		154(6.06)	
7.9x150	150(5.9)	7.9(0.311)	37(1.46)	800(180)
7.9x200	200(7.87)		50(1.97)	
7.9x250	250(9.84)		63(2.48)	
7.9x300	300(11.8)		76(2.99)	
7.9x350	350(13.78)		89(3.5)	
7.9x400	400(15.75)		102(4.02)	
7.9x450	450(17.72)		115(4.53)	
7.9x500	500(19.69)		128(5.04)	
7.9x550	550(21.65)		141(5.55)	
7.9x600	600(23.62)		154(6.06)	
7.9x650	650(25.59)		167(6.57)	
7.9x700	700(27.56)		180(7.09)	
7.9x750	750(29.53)		191(7.52)	
7.9x800	800(31.5)		193(7.59)	

Stainless Steel PVC Full Coated Cable Tie-Ball Lock Type

Grade:304 and 316

Operating temperature: -40°C-85°C



Part Number	Approx.Length mm(inch)	Approx. Width mm(inch)	Max.Bundle Dia. mm(inch)	min.loop Tensile Strength N(lbs)
4.6x150	150(5.9)	4.6(0.181)	37(1.46)	600(135)
4.6x200	200(7.87)		50(1.97)	
4.6x250	250(9.84)		63(2.48)	
4.6x300	300(11.8)		76(2.99)	
4.6x350	350(13.78)		89(3.5)	
4.6x400	400(15.75)		102(4.02)	
4.6x450	450(17.72)		115(4.53)	
4.6x500	500(19.69)		128(5.04)	
4.6x550	550(21.65)		141(5.55)	
7.9x600	600(23.62)		154(6.06)	
7.9x150	150(5.9)	7.9(0.311)	37(1.46)	800(180)
7.9x200	200(7.87)		50(1.97)	
7.9x250	250(9.84)		63(2.48)	
7.9x300	300(11.8)		76(2.99)	
7.9x350	350(13.78)		89(3.5)	
7.9x400	400(15.75)		102(4.02)	
7.9x450	450(17.72)		115(4.53)	
7.9x500	500(19.69)		128(5.04)	
7.9x550	550(21.65)		141(5.55)	
7.9x600	600(23.62)		154(6.06)	
7.9x650	650(25.59)		167(6.57)	
7.9x700	700(27.56)		180(7.09)	
7.9x750	750(29.53)		191(7.52)	
7.9x800	800(31.5)		193(7.59)	

S.S.PVC Coated Cable Tie-Releasable Type

Grade:304 and 316
Operating temperature: -40°C-85°C



Part Number	Approx.Length mm(inch)	Approx. Width mm(inch)	Max.Bundle Dia. mm(inch)	min.loop Tensile Strength N(lbs)
6.3x152	152(6)	10(0.39)	33(1.3)	1000(225)
6.3x229	229(9)		46(1.8)	
6.3x305	305(12)		65(2.6)	
6.3x457	457(18)		81(3.2)	
6.3x610	610(24.4)		97(3.8)	
9.6x152	152(6)		113(4.4)	
9.6x229	229(9)		129(5.1)	
9.6x305	305(12)		141(5.6)	
9.6x457	457(18)		161(6.3)	
9.6x610	610(25.4)		176(6.9)	
9.6x762	762(30.5)		192(7.6)	
9.6x914	914(36.5)		208(8.2)	

Stainless Steel PVC Coated Cable Tie-Multi Lock Type

Grade:304 and 316
Operating temperature: -40°C-85°C



Part Number
7x150
7x225
7x300
7x335
7x400
7x450
7x490
7x550
7x600
7x650
7x700
7x750
7x800
12x150
12x225
12x300
12x335
12x400
12x450
12x490
12x550
12x600
12x650
12x700
12x750
12x800

Stainless Steel Band (Grade: 201, 304, 316)



Buckle



Part Number	Width		Thickness mm	Package roll
	Inches	mm		
6.4x0.38	1/4	6.4	0.38	30M
9.5x0.38	3/8	9.5	0.38	
10x0.4	3/8	10	0.4	
12.7x0.4	1/2	12.7	0.4	
16x0.4	5/8	16	0.4	
19x0.4	3/4	19	0.4	
12.7x0.76	1/2	13	0.76	
16x0.76	5/8	16	0.76	
19x0.7	3/4	19	0.7	
19x0.76	1/2	19	0.76	

Cable Tie Tool



STT1



STT2




LQA



LQA-002

Multihole Suspension Band



PVC Coated

12X0.7X10M
17X0.7X10M
19X0.7X10M


Expand Nail



Size: 6mm 8mm 10mm 12mm

Art.-No. E0650

E6 50PCS W/S 4x40mm



Art.-No. E0850

E8 50PCS W/S 5x40mm




Art.-No. E1050

E10 50PCS W/S 5x50mm



Expand Nail



Art.No.E8x80x50

E8x80x50 pcs w/screw



Art.No.E10x100x50

E10x100x50 pcs w/screw



Tie Mounts



Type
20X20
25X25
30X30
40X40

Cable Tie Holder



Type	H	L	W	D
CTH-2A	9.5	22	16	4.5
CTH-2B	9.5	22	16	6.8
CTH-2C	9.5	22	16.5	5.8

Butterfly Clip



14mm

Nylon Nail Plug



5x33mm

Spiral Wrapping Bands



Item.No.
6
8
10
12
16
20
25

Spiral Wrapping Bands (New Type)



Item.No.
CHT-15A
CHT-20A
CHT-25A
CHT-30A

R-Type Cable Clamps



Item.No.
DB-1/8R
DB-3/16R
DB-1/4R
DB-5/16R
DB-3/8R
DB-1/2R
DB-5/8R
DB-3/4R
DB-1R

Movable Bushing



Item.No.
GMB-10A
GMB-16A
GMB-25A

Saddle Type Clip




Item.No.
SCP-16
SCP-20
SCP-25
SCP-32

Saddle Clamp




Type:8,10,12,14,16,19,21,25,31,38,48mm

Wire Duct

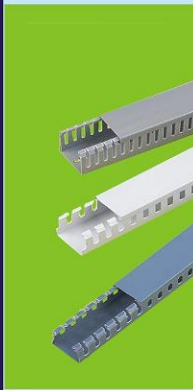


HxW(mm)	Length	HxW(mm)	Length
20x15	2M	50x25	2M
20x25			
25x25			
30x15			
30x20			
30x25			
30x30			
30x35			
30x45			
35x30			
35x35			
35x40			
40x25			
40x30			
40x40			
50x15			

Wire Duct(slotted)



HxW(mm)	Length
10x15	2M
10x20	
10x25	
15x25	
20x30	
20x35	
25x40	
30x50	
30x60	
50x80	
50x100	
80x100	
100x100	

Cable Marker

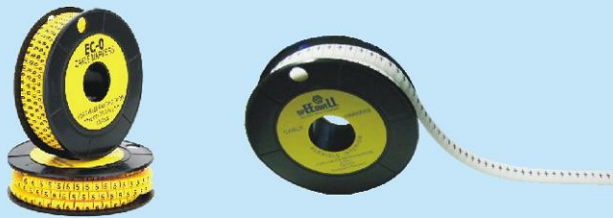

Type	Approx wire		markers	packing
	sq	mm		
EC-0	0.75-1.5	0.75-3	0-9 A-Z + ^ *	1000Pcs/Roll
EC-1	2.5	2.6-4.2		1000Pcs/Roll
EC-2	4.2	3.6-7.4		500Pcs/Roll
EC-3	6-10	6-10		250Pcs/Roll
EC-J	4	3.6-7.2		500Pcs/Roll

Cable Markers Strip



Type	L mm(inch)	W mm(inch)	Hole of cable tie mm(inch)	Applicable number combination(pcs.)	Packing
SM-65	65(2.56)	9(0.35)	4(0.16)	19	100Pcs
SM-90	90(3.54)	9(0.35)	4(0.16)	13	
SM-110	110(4.33)	9(0.35)	4(0.16)	16	
SM-130	130(5.12)	9(0.35)	4(0.16)	18	

Tester




Tester (K type)




Haddle



Aluminum Tape(W/O glue)



Cable Joint Kits

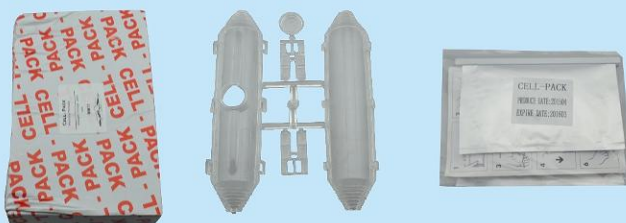

Item No.	Cable Dia mm	Apply Cable	
		Without Armour mm ²	Armour mm ²
M11	6-32	4x4-16	5x2.5-10
M12	20-38	4x25-50	5x16-35
M13	26-50	4x70-95	5x50-95
M14	35-65	4x150-185	5x120-150

Pulling Spring(metal)



A:(Hook+Hook)



B:(Hook+Ball)



C:(Hook+Bending)

Art.No	Length(M)	Sizes(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
DB M3205	5	3.2x0.5	27x14x23	100	7
DB M3210	10	3.2x0.5	29x15x23	100	14
DB M3215	15	3.2x0.5	31x16x23	100	21
DB M3220	20	3.2x0.5	33x17x23	100	28
DB M3225	25	3.2x0.5	35x18x23	100	35
DB M3230	30	3.2x0.5	37x19x23	100	42
DB M5005	5	5x0.5	27x14x23	72	7.5
DB M5010	10	5x0.5	29x15x23	72	14.5
DB M5015	15	5x0.5	31x16x23	72	22
DB M5020	20	5x0.5	33x17x23	72	29
DB M5025	25	5x0.5	35x18x23	72	36
DB M5030	30	5x0.5	37x19x23	72	43.5

Cable Puller(Nylon) Solid $\Phi 3\text{mm}(\pm 0.1\text{mm})$



A:Brass







B: Metal



C: Metal

Art.No	Length(M)	Diam.(mm)	Art.No	Length(M)	Diam.(mm)
NS3005	5	$\Phi 3$	NS4005	5	$\Phi 4$
NS3010	10	$\Phi 3$	NS4010	10	$\Phi 4$
NS3015	15	$\Phi 3$	NS4015	15	$\Phi 4$
NS3020	20	$\Phi 3$	NS4020	20	$\Phi 4$
NS3025	25	$\Phi 3$	NS4025	25	$\Phi 4$
NS3030	30	$\Phi 3$	NS4030	30	$\Phi 4$

Color Available  black  yellow  red  blue

Cable Puller(Nylon) Solid $\Phi 4.4\text{mm}(\pm 0.15\text{mm})$



Art.No	Length(M)	Diam.(mm)
NS 4410	10	$\Phi 4.4$
NS 4415	15	$\Phi 4.4$
NS 4430	30	$\Phi 4.4$
NS 4450	50	$\Phi 4.4$
NS 4460	60	$\Phi 4.4$

Cable Puller(Nylon) With filling $\Phi 4\text{mm}(\pm 0.1\text{mm})$



Single rod



More rod



Art.No	Length(M)	Diam.(mm)
NS4010	10	$\Phi 4$
NS4015	15	$\Phi 4$
NS4020	20	$\Phi 4$
NS4025	25	$\Phi 4$
NS4030	30	$\Phi 4$

Cable Puller(Nylon) Twist $\Phi 7\text{mm}(\pm 0.2\text{mm})$



Art.No	Length(M)	Diam.(mm)
NS7015	15	$\Phi 7$
NS7030	30	$\Phi 7$
NS7040	40	$\Phi 7$
NS7050	50	$\Phi 7$
NS7060	60	$\Phi 7$

Remarks: $\Phi 4.5\text{mm}$, $\Phi 6.0\text{mm}$ Dia. Available.

Fishing Tape

(New)



Art.No	Length(M)	Sizes(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
FTB 1330	30	3x1.3	37x32x23	6	8
FTB 1340	40	3x1.3	37x32x23	6	10
FTB 1350	50	3x1.3	37x32x23	6	12
FTB 1360	60	3x1.3	37x32x23	6	14

Fishing Tape (Fiberglass)



Art.No	Length(M)	Sizes(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
FTBNF 1330	30	4	37x32x23	6	8
FTBNF 1340	40	4	37x32x23	6	10
FTBNF 1350	50	4	37x32x23	6	12
FTBNF 1360	60	4	37x32x23	6	14

Fishing Tape(Fiberglass with Rod)



Art.No	Length(M)	Sizes(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
FTBNFR 1330	30	4	37x32x23	6	8
FTBNFR 1340	40	4	37x32x23	6	10
FTBNFR 1350	50	4	37x32x23	6	12
FTBNFR 1360	60	4	37x32x23	6	14

Wire-steel



Art.No	Length(M)	Sizes(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
DBFM1315	15	1.3X3	41X41X13	20	10
DBFM1330	30	1.3X3	44X22X15	10	10
DBFM1360	60	1.3X3	25X25X17	5	10

Bending Spring



Art.No	Length(M)	Diam.(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
BS5516	55	Φ12	58x7x6	20	5.5
BS5520	55	Φ16	58x9x7	20	8
BS5525	55	Φ20	58x11x9	20	11
Bs5532	55	Φ26	58x14x11	20	13



Art.No	Length(M)	Diam.(mm)	Meas(cm)	Pcs/Ctn	N.W(kg)
BS7016	70	Φ12	72x7x6	20	7.5
BS7020	70	Φ16	72x9x7	20	11
BS7025	70	Φ20	72x11x9	20	14.5
BS7032	70	Φ26	72x14x11	20	17

Cable Puller(Steel Spiral Wire)



Copper Plated

Art.No	Length(M)	Diam.(mm)	Diam.(mm)	Diam.(mm)
DB M3005	5	Φ3	Φ3.8	Φ5.5
DB M3010	10	Φ3	Φ3.8	Φ5.5
DB M3015	15	Φ3	Φ3.8	Φ5.5
DB M3020	20	Φ3	Φ3.8	Φ5.5
DB M3025	25	Φ3	Φ3.8	Φ5.5
DB M3030	30	Φ3	Φ3.8	Φ5.5

Bending Spring(horn)



Art.No	Length(M)	Diam.(mm)
BS5516	30	Φ12
BS5520	30	Φ16
BS5525	30	Φ20
BS5532	30	Φ26

Fiberglass Rod



4.5mmx30m
4.5mmx50m
4.5mmx60m
4.5mmx80m
4.5mmx90m
4.5mmx100m
4.5mmx120m
8mmx100m
8mmx150m
8mmx200m
8mmx250m
8mmx300m
11mmx100m
11mmx150m
11mmx200m
11mmx250m
11mmx300m

Cable Roller:Aluminum



Dia:140mm
Width:160mm

Detector of Pipe Blockage

