


LED SLIM RECESSED SQUARE DOWNLIGHT

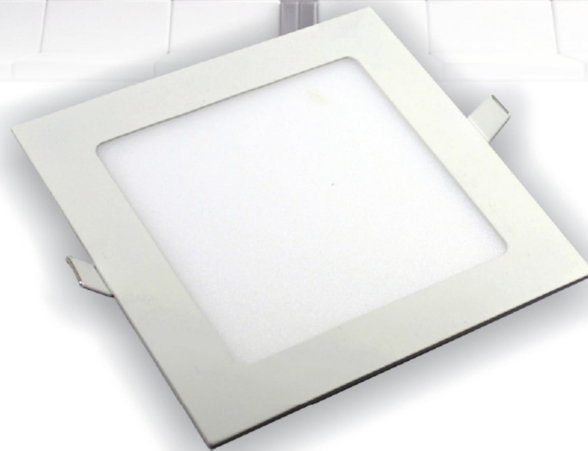

Product Features

- Thermal Conductive Plastic Coated
- Aluminum Housing
- V-0 Flame rating
- Integrated design, built-in Driver
- Class II Electrical protection
- L70 - 30,000Hrs
- CE , CB, ROHS ErP certified product

Application

- Offices
- Classrooms
- Hall ways
- Luxurious Hotels
- Supermarkets

Advantages

- 80% Energy Saving
- Environmentally Safe
- Less Heat produced
- Innovative ,
- Easy installation and long Life



TECHNICAL DATA

Product Code	: RL 24W-RS
Power	: 24W
Voltage	: 220-240V AC
Luminous Flux	: 1340 / 1440 / 1440Lm
Efficacy	: 80 Lm/W
Energy efficiency	: A+
Net weight	: 0.46 Kg
CRI	: > 80
Beam angle	: 140°
Operating temperature	: -20 °C to + 40 °C
Storage temperature	: Up to 50°C
Material	: Aluminium & Plastic body
CCT	: 3000K / 4000 / 6500K
IP	: 44
Dimmable	: No
Life Time	: 30,000Hrs
Cover	: Frosted Diffuser
Finishing color	: White
Mounting	: Recessed
Size in mm (LxWxH)	: 225X225X12

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

